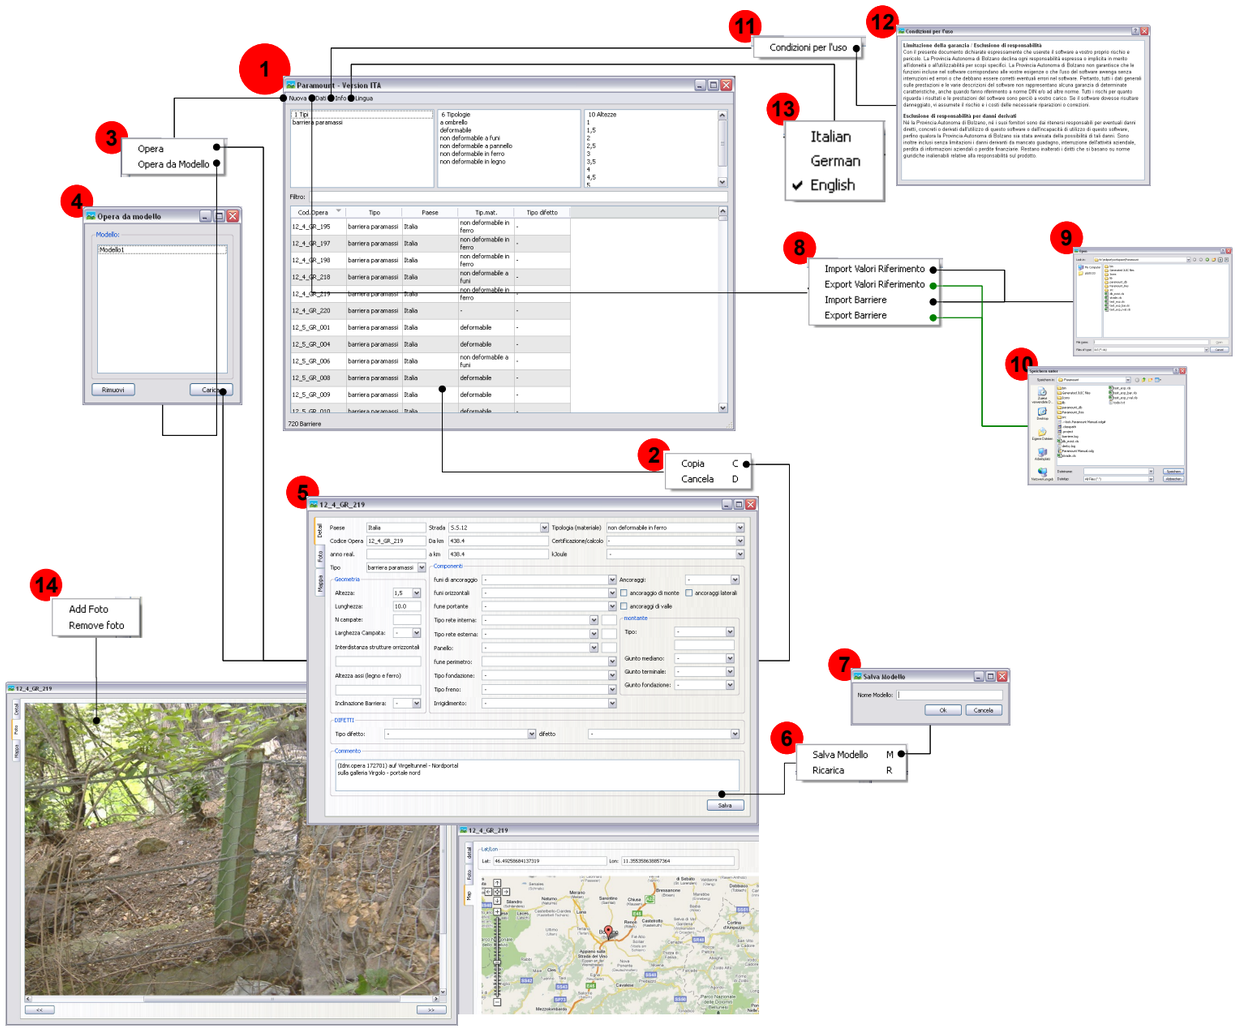

1 Main Window of the Software Paramount,
In this Window you will find the Filter fild. The text Filter searches over all Displayed Fields. The lists permit to filter the protection mesures by typ, le tipology and hight.

2 Context menu for the protection mesure table.
The command *cancel*, removes the selected protection mesure. With the command *copy* you can create a copy of the selected protection mesure. The copy can be saved by pushing the button "Save" in the detail dialog (5).

3 Menu New
The command *Protection measure* creates a new protection mesure. All the filds will be empty.
The command *Protection measure from Model* creates a new protection mesure. The filds will be precompiled with the values of the selected Model.

4 Modell selection
This Dialogo allows to select a Modell of protection measure. The values of the model will be used to create a new protection mesure. The Button *Remuve* will cancel the selected Modell.

5 Detail of Protection measure
Questa finestra visualizza il dettaglio del Opera. Solamente premendo il bottono *Salva* l'opera verra creata o le modifiche salvate. For the saved protecion mesures it's possible to attach pictures, you can also locate the geografical position with the help of Google Maps.

To use Google Maps you need a internet connection. It's also possible to use a Proxy. The settings for the proxy can be modified by editing the file config.xml in the Paramount installation directory.

Example with Proxy:
```
<entry key="proxy_server">bloxy.prov.bz</entry>
<entry key="proxy_port">8080</entry>
<entry key="proxy_usr">username</entry>
<entry key="proxy_pwd">password</entry>
```

Example without Proxy:
```
<entry key="proxy_server"></entry>
<entry key="proxy_port"></entry>
<entry key="proxy_usr"></entry>
<entry key="proxy_pwd"></entry>
```

PARAmount

AUTONOME PROVINZ BOZEN SÜDTIROL
PROVINCIA AUTONOMA DI BOLZANO ALTO ADIGE

6 Context Menu for protection mesure details
The command *Reload* allows to refresh the values of displayed Data, edits are lost.
Il commando *Save Modello* allows to save the submitted data as Modell witch can be reused for the creation of new protection mesures.

7 Sve Modell
This dialog gives you the possibility to give a name to the model of protection mesure. Only after pressing Ok the modell will be created.

8 In the menu data you will find options for import and export of the data. Every record is identified by a unique universal id (UUID) and a time marker of the last modification (Timestamp).
With the protection mesuares are also exported the models.

The import functions will use the UUID and Timestamp to decide if the new record will be imported, modified or ignored. There can be problems if the reference values didn't exist in paramount at the moment you decide to import the data of protection mesures.

Allowed Typs for the import of reference Values:
- Altezza
- Ancoraggi
- Diff
- Inclinazione
- Kjoul
- LarghCampate
- Tipo
- TypAncoraggi
- TypCert
- TypDiff
- TypFondazione
- TypFreno
- TypFune
- TypIrrigidimento
- TypMat
- TypMont
- TypMontFond
- TypMontMedi
- TypMontTerm
- TypRete
- Strada

9/10 Dialogs for the selection of files for import and export actions

11/12 Terms of use. Read carefully bevore use.

13 In this menu you can select the language. You can select between one of the three following languages italian, german and english.

14 This popup menu permits to add and remove pictures from an existing protection mesure

Alpine SPACE
EUROPEAN TERRITORIAL COOPERATION
THIS PROJECT IS CO-FUNDED BY THE EUROPEAN REGIONAL DEVELOPMENT FUND
investing in your future

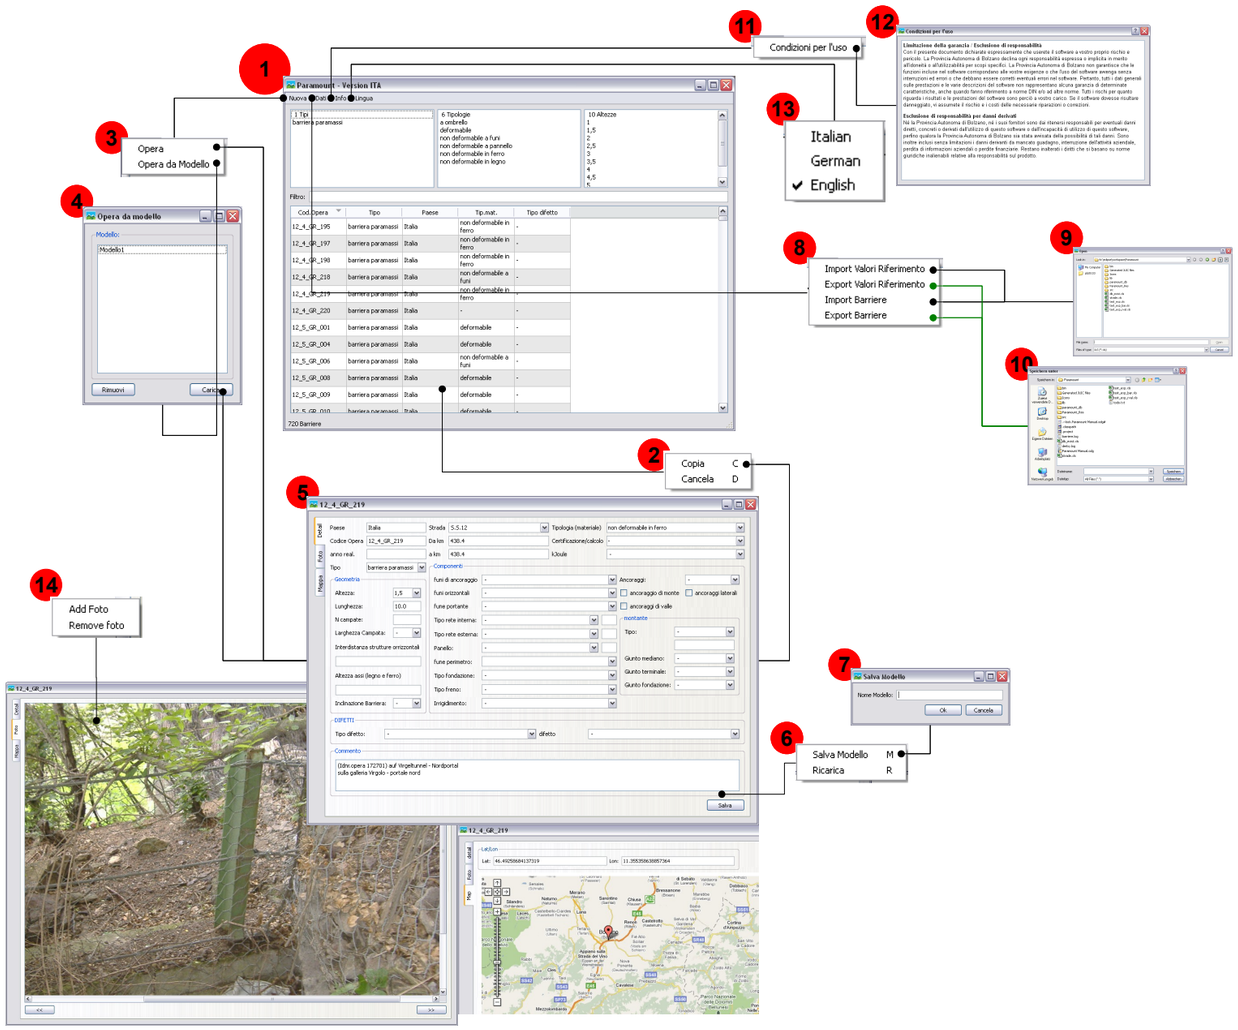

1 Finestra principale del Software Paramount, Su questa finestra si trova il camp Filtro il quale filtra le Opere secondo i campi testo visibili e invisibili. Le liste di valori permettono di aplicare un filtro sui tipi, le tipologie e l'altezza delle opere.

2 Menu di contesto per la tabelle delle Opere. Il commando *cancela*, rimuve l'opera selezionata. Con il comando *copia* e possibile creare una copia del opera. La copia verrà salvata dopo aver premuto il bottone Salva nel dettaglio **5** del Opera.

3 Menu Nuova
Il commando *Opera* crea una nuova opera senza alcuna precompilazione dei campi.
Il commando *Opera da Modello* permette di creare un Opera precompilata secondo un Modello.

4 Selezione modello
Questo Dialogo permette di selezionare il modello dal quale si vuole creare un Opera nuova. Con il pulsante *Rimuovi* viene cancellato il modello di Opera creato.

5 Detaglio del Opera
Questa finestra visualizza il dettaglio del Opera. Solamente premendo il bottono *Salva* l'opera verra creata o le modifiche salvate. Per le opere salvate e possibile attacare e visulaizzare le foto, e la posizione geografica con l'aiuto di Google Maps.

Per usare Google Maps e necessario disporre di una connessione internet. E possibile usare anche un Proxy. Le impostazioni del Proxy possono essere effetuate modificando il file config.xml nella cartella di installazione di Paramount.

Example with Proxy:
```
<entry key="proxy_server">bloxy.prov.bz</entry>
<entry key="proxy_port">8080</entry>
<entry key="proxy_usr">username</entry>
<entry key="proxy_pwd">password</entry>
```

Example without Proxy:
```
<entry key="proxy_server"></entry>
<entry key="proxy_port"></entry>
<entry key="proxy_usr"></entry>
<entry key="proxy_pwd"></entry>
```

PARAmount

AUTONOME PROVINZ BOZEN SÜDTIROL
PROVINCIA AUTONOMA DI BOLZANO ALTO ADIGE

6 Menu contesto per Dettaglio
Il commando *Ricarica* permette di ricaricare i valori come erano prima di eventuali modifiche.
Il commando Salva Modello permette di salvare i dati immesi come Modello.

7 Salva Modello
Si puo dare un nome al Modello del Opera. Dopo aver premuto Ok l'Opera i dati del Dettaglio vengono salvati col nome specificato come Modello.

8 Sotto il Menu Dati e possibile Importare e Esportare i valori di Riferimento e i Dati relativi alle Barriere. Ogni record e dotato di identificatore Universalte (UUID) e marca temporale del ultima modifica (Timestamp). Oltre alle Barriere vengono anche esportati / importati i Modelli.

Le funzioni di Import considerano i UUID e Timestamp in base ai quali viene deciso se importare, modificare o ignorare i Dati da importare. Possono nascere problemi se i Valori di riferimento usati nei dati da importare non esistono come valori di riferimento nel Database.

Tipi Ammessi per l'import di Valori di Riferimento:
- Altezza
- Ancoraggi
- Diff
- Inclinazione
- Kjoul
- LarghCampate
- Tipo
- TypAncoraggi
- TypCert
- TypDiff
- TypFondazione
- TypFreno
- TypFune
- TypIrrigidimento
- TypMat
- TypMont
- TypMontFond
- TypMontMedi
- TypMontTerm
- TypRete
- Strada

9/10 Dialogi per Selezionare file per Import o Export

11/12 Condizioni d'uso. Leggere attentamente prima del uso.

13 In questo menu e possibile selezionare la lingua del Applicazione. Sono a disposizione le lingue Italiano, Tedesco, ed Inglese

14 Questo menu di contesto permette ad aggiungere e togliere le Foto dalle Opere inserite

Alpine SPACE
EUROPEAN TERRITORIAL COOPERATION
THIS PROJECT IS CO-FUNDED BY THE EUROPEAN REGIONAL DEVELOPMENT FUND
investing in your future